
Special Lighting Requirements for TREE WHISPERS

Name of Area	Function of Instrument	Focus	Colour
Special Area A	45° DR, cool, separate control	Soft edge	R 60
9'/2.7m diameter pool	45° DL, warm, separate control	Soft edge	R 05
	45° Backlight, straw, separate control	Soft edge	R 13
	45° Backlight, blue, separate control	Soft edge	R 78
	Substitute one downlight if four are unavailable	Soft edge	OW
Warm Side-light	SR shin-kickers 1'/.3m	Soft edge	R 36
	SL side-booms @ 4'6"/1.4m - horizontal cross	Soft edge	R 05
	SR tips - high cross-light	Soft edge	R 16
Cool Side-light	SL shin-kickers 1'/.3m	Soft edge	R 92
	SR side-booms @ 4'6"/1.4m - horizontal cross	Soft edge	R 66
	SL tips - high cross-light	Soft edge	R 65
Gobo Washes	Bare branches	Hard edge	R 60
	Fine leaves	Hard edge	R 88
Diagonal Back-light		Soft edge	R 86
		Soft edge	R 57

Notes:

All lights to be focused and shuttered off the projection surface leaving a 3'/1m deep unlit strip directly infront of the projection surface. If there is enough stage space, rear projection is prefered. No cross-over is needed by the performers.

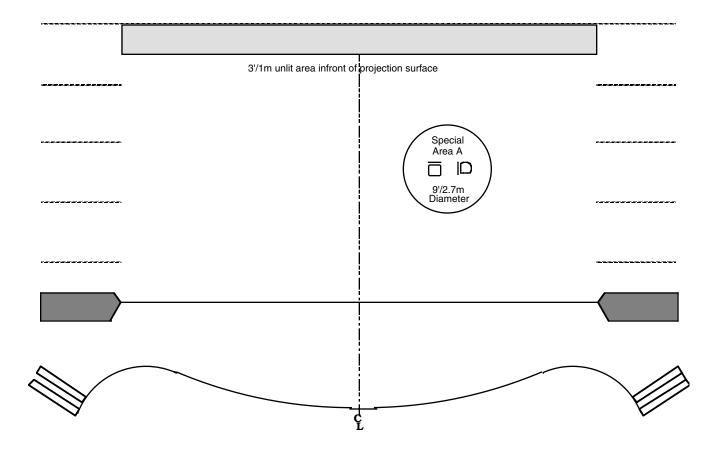

Special Lighting Requirements for TREE WHISPERS

Name of Area Function of Instrument

Focus

Colour